

Macadams Retarder Provers



FEATURES & BENEFITS

- STAINLESS STEEL INTERIOR.
- ROLLERS & PIVOTING DOORS.
- PRE-ENAMELED OUTSIDE.
- FPC3HR CONTROL BOARD.



Technical Specs

Macadams Retarder Provers

	AC16BV	AC24V	SPAU 1x4 ROLL IN RACKS	SPAU 5x4 ROLL IN RACKS
Supply Voltage	230 V, 50 Hz, Single phase, neutral & earth.	230 V, 50 Hz, Single phase, neutral & earth.	400 V, 50 Hz, 3 phase, neutral & earth.	400 V, 50 Hz, 3 phase, neutral & earth.
Power Rating	0.75 kW	1 kW	2.5 kW	5 x 2.5 kW
Cold Power: HP Watts	1/4 511	1/4 511	2 3242	5 x 2 5 x 3242
Capacity	400 x 600 mm, 16 trays	400 x 600 mm, 24 trays	560 x 950 mm -	560 x 950 mm -
Dimensions: (mm) External	790 (w) x 1200 (d) x 1095 (h)	635 (w) x 1095 (d) x 2230 (h)	1004 (w) x 4094 (d) x 2275 (h)	4812 (w) x 4116 (d) x 2275 (h)
Internal	-	-	700 (w) x 3900 (d) x 1920 (h)	5 x 700 (w) x 3875 (d) x 1920 (h)

Contact Details

HEAD OFFICE, EXPORTS & CAPE TOWN BRANCH

Private Bag X7, Kuils River, 7579,
South Africa.

Tel : +27 (21) 907-1000

Fax : +27 (21) 907-1111

JOHANNESBURG BRANCH

Tel : (011) 472-4100

Fax : (011) 472-4154

DURBAN BRANCH

Tel : (031) 569-6290

Fax : (031) 569-6296

EMAIL

info@macadams.co.za


WEBSITE

www.macadams.co.za

We reserve the right to both
technical and design
modifications.

February 2009

FPC3 HR control board

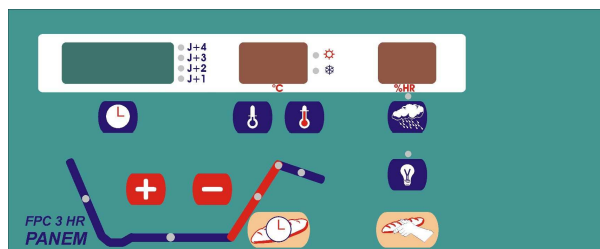

The Company. The People. The Products.

