


CASE ERECTOR CE-11-P

The case erector CE-11-P forms cases with length up to 730 mm. The performance of the CE-11-P is also guaranteed when handling boxes with minimal carton thickness. Standard in hot melt execution, also available in tape execution.

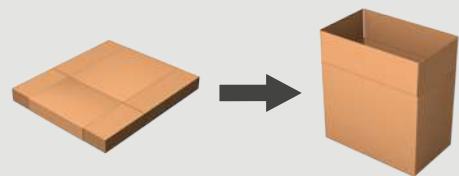

COMBINE WITH
**THE BAGMAKER
INSERTER**

Minimize your running cost

- Trouble-free case erecting even with **thin cartons**.
- Lower running cost and continuous production with hot melt.

Designed to be better

- **No more crushed cartons** thanks to the perfectly controlled case erecting.
- Guaranteed **box squareness** for a trouble-free packaging process.
- Only **5 adjustments** for a quick format change.

TECHNICAL SPECIFICATIONS CE-11-P

Perfectly controlled case erecting

- The failsafe carton separator separates each carton individually from the magazine.
- Two opposing vacuum cups grip the blank at two sides for optimal carton opening.
- Less demanding on the box quality because the box is clamped at three sides during case flap folding.

Perfectly squared box

- The synchronised chain guiding system ensures a perfectly squared box.

Guaranteed closed bottom



- Downwards spraying of the nozzles, eliminates the risk of clogging.
- The upper and lower mechanical plunger bonds the case flaps firmly.

CE-11-P hot melt is standard equipped with:

- Nordson hot melt device
- Hot melt nearly finished: hot melt level detection enables refilling before hot melt is completely empty.
- Colour touch panel

CE-11-P tape is standard equipped with:

- Colour touch panel

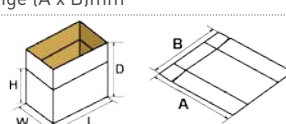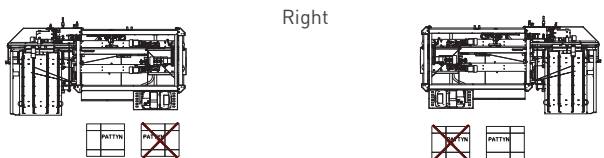
CASE DIMENSIONS (For other dimensions, please contact Pattyn)	
Range (L x W x H // D) mm	Min. 300 (L) x 200 (W) x 150 (H) // 250 (D) Max. 730 (L) x 500 (W) x 400 (H) // 650 (D)
Range (A x B)mm	Min. 500 (A) x 350 (B) Max. 1100 (A) x 900 (B) Length – height relation: D/L < 1,3 Outside dimensions
	
TECHNICAL FEATURES	
Left	Right
	
OUTPUT AND CONSUMPTION	
Output hot melt	Standard up to 16 c/min
Output tape	Standard up to 12 c/min, upgradeable to 16 c/min
Installed power	3 kW
Voltage	3 x 400 V + N + E / 50 Hz
Air supply	6 bar / 1/2"
Air consumption	35 NI / cycle
Weight	1150 kg
OPTIONS (more options are available, please contact Pattyn)	
Longer carton magazine: 2 m	
Ergonomic tape exchange with second taping head	
Access point for remote support	
Advanced stainless steel execution	



Failsafe carton separator



Box is clamped at three sides




Synchronised chain system



Hot melt unit



Mechanical plunger for perfect bonding

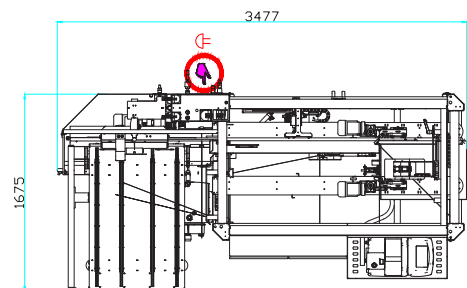

Machine height 1880 mm

Pattyn Packing Lines nv
Industriepark 'Blauwe Toren'
Hoge Hul 2, 8000 Brugge - Belgium

T +32 (0) 50 450 480
info@pattyn.com
www.pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customised executions please contact Pattyn. CE-11-P 2017 - V01

PATTYN[®]

Turnkey solutions for industrial packaging.